

ITC Specialist Seminar, Adelaide, 1989. Paper No. 16.1

Approximate Performance Analysis of the DQDB Access Protocol

Phuoc TRAN-GIA and Thomas STOCK

Institute of Computer Science, University of Würzburg,
Am Hubland, D-8700 Würzburg, Federal Republic of Germany

Abstract *We present an approximate performance study of the DQDB medium access protocol. The aim of the queueing analysis described in this paper is to provide close-form solutions, which should be easy to evaluate but deliver sufficiently accurate performance measures describing major behaviors of the protocol. The analysis is based on a decomposition of the medium access delay, using the technique of embedded models. The non-isochronous station-to-station traffic matrix, which consists of traffic streams assumed as Poisson, can be chosen arbitrarily. A percentage of preassigned isochronous traffic in the system is taken into account. It is shown by comparison with simulation results that the approximation technique developed in this paper is appropriate for a wide range of protocol parameters. The efficient analysis method also shows various protocol properties, which have been partly discovered in the literature by means of simulations.*

1. Introduction

The Distributed Queue Dual Bus (DQDB) access protocol is a promising candidate for upcoming high-speed local area and metropolitan area network standards, e.g. as being defined in IEEE 802.6. Attentions are devoted to this medium access scheme in some recent studies, both from technological and protocol performance viewpoints.

There is a number of simulation studies [3,10,2] and approximate analysis [11,12,13] dealing with performance aspect of various successive releases of the standardization process [1,4,6,7,8]. In Wong [10] attentions are devoted to the protocol behavior under saturated traffic conditions. The study gives analytical insight into the station-based traffic discrepancy and the relationship between the overload performance and the initial system state prior to the overload period. A comparative study is given in Huber et al. [3] dealing with the delay performance of FDDI and QPSX/DQDB in high-speed networks. Zukerman [11,12,13] studied various aspects of DQDB performance using approximate queueing analyse.

Since the DQDB medium access protocol is dedicated for use in high-speed metropolitan area networks and large local area networks, the number of stations to be considered in performance investigations should be chosen large enough to reflect the real system environments. This choice and the according number of events needed in simulation studies may lead to excessive simulation time. To investigate sufficiently large configurations with varying parameter ranges, analytical investigation methods are required.

The aim of the analysis method developed in this paper is to give close-form solutions, which should be simple to evaluate and have a sufficient approximation accuracy over a realistic range of parameters. The analysis is composed by standard basic models of type M/G/1, whereby the service time of the next model level is composed by the waiting time of the previous modeling level and station-dependent random processes. We refer to this as the concept of embedded models. In Section 2 the main properties of the DQDB medium access mechanism are summarized. Section 3

gives an outline of modeling steps, arising parameters and details of the analysis. Some numerical results for system configurations with symmetrical and nonsymmetrical traffic will be presented in Section 4.

2. The DQDB access mechanism

The basic logical structure of a DQDB access system is depicted in Fig. 1. As the details of the protocol can be found in [4], we will summarize below only those characteristics of the DQDB operation, which are relevant in the system modeling context.

The transmission part consists of a pair of slotted unidirectional buses flowing in opposite directions. This dual pair of busses — bus A for downstream and bus B for upstream payload traffic — operates synchronously at MAC layer. A station attached to the dual bus system observes data passing on the two busses and participates in a distributed queueing scheme applied to the global system. The aim of this scheme is to provide each station with information about the overall queueing state of the system. This may help to achieve a system behavior that approaches a global FIFO queue.

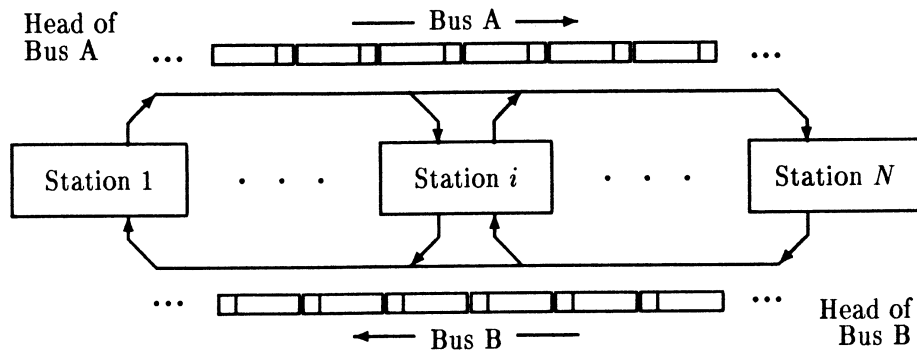


Figure 1: *DQDB system structure*

Each station is connected to both busses and is able first to read the information on the above read tap and then to write to the appropriate bus on the beneath write tap. Since the access mechanism is identical for the two busses, the description below will focus on one direction. For this, we take the downward data transfer on bus A and the corresponding request transfer on bus B. Furthermore, in the DQDB standard proposal, a station is allowed to send data according to four priority levels. Although this feature can be considered in full detail in the analysis, the case of one priority level will be taken below, in order to simplify the description.

A slot contains an access control field (ACF), a segment header and a segment payload area for isochronous and non-isochronous (asynchronous) traffic. For these different types of traffic two access control modes are provided. The pre-arbitrated access mode is reserved for isochronous services like voice and video. This mode is controlled by the slot generators, which mark the preallocated slots using the BUSY bit in the ACF. Accesses of non-isochronous services are controlled by the station itself according to the queued-arbitrated [4] access mode. We will discuss this access mode in more detail.

If a station wants to transfer a non-isochronous segment downstream using bus A, it notifies this wish to all stations upstream by sending a request on bus B. This is done by using the request bit on the given priority level. In parallel the station continuously makes note about all requests flowing by on bus B. While the station has several separate queues for segments waiting to be transferred on both busses and different priority levels, the station schedules only one segment per bus. In other

words, each station has one schedule position facing to each bus for each priority level, but only one of them can be active. The scheduled segment waiting to be transmitted in the station may not be sent before all preceding requests which were observed on bus B are served. To do this, the station has to wait until the corresponding observed number of free segments has passed on bus A.

Considering only data transfer on bus A and one priority, a station can be in the following two states: IDLE and COUNTDOWN (see Fig. 2). We consider in the following the station i . For each bus and priority level the station has to maintain different counters, in particular the request counter (REQ_COUNT) and the countdown counter (CD_COUNT).

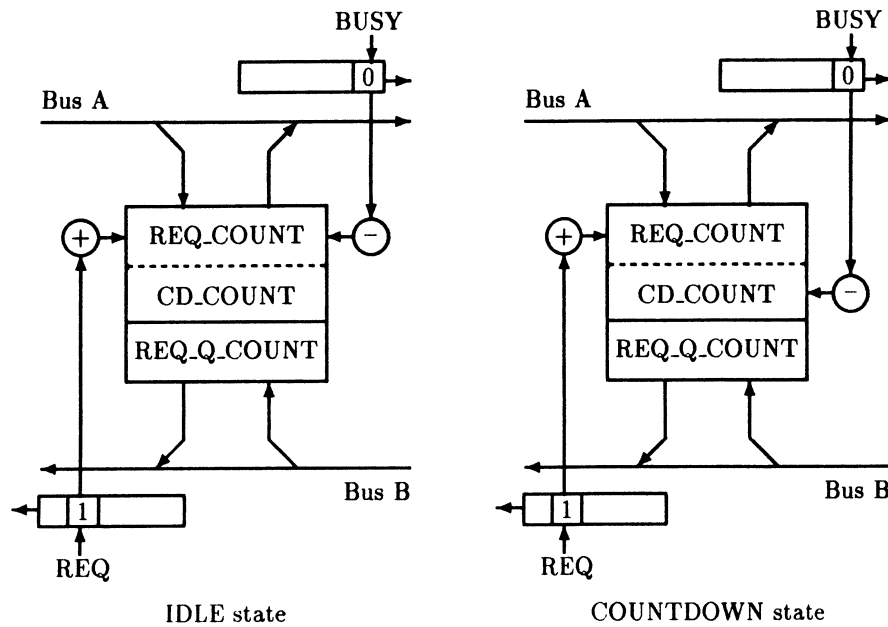


Figure 2: Logical states of a DQDB station

1. IDLE-state: the station has nothing to send or was on immediate transition from state COUNTDOWN. The request counter maintains the number of requested transmissions sent by stations $i + 1, \dots, N$. This counter is decremented upon observing a free slot flowing by on bus A and is incremented upon seeing a request passing by on bus B.
2. COUNTDOWN-state: the station has data segments to transmit. A segment has been scheduled at time t_0 for transmission. The request counter indicates the number of request arrivals after t_0 . The countdown counter maintains the number of requests which arrived prior to t_0 and have to be served before the scheduled segment. In this state, the countdown counter is decremented by observing a free slot flowing by on bus A while the request counter is incremented upon arrival of a new request on bus B.
3. State transitions: A state transition from IDLE to COUNTDOWN is processed as follows. The station enqueues a request to the local request queue, sets the countdown counter to the actual value of the request counter and then resets the request counter. The station always takes over from COUNTDOWN to IDLE after sending a segment. This is followed immediately by a backward state transition from IDLE to COUNTDOWN if there are still segments waiting in the station.

3. Modeling and analysis

3.1 System model and assumptions

We consider a network with N attached stations operating with the DQDB access protocol. The distance between station i and j is denoted by r_{ij} . The network carries both isochronous and non-isochronous traffic. The isochronous traffic (e.g., voice, video etc.) is preallocated slot-wise by the slot generator. As mentioned, in order to simplify the description of the analysis, we consider in the following the simpler case of one priority level. Further, since we have a dual symmetrical bus system with decomposable traffic flows, it is sufficient to investigate only one data flow direction. The analysis of the other direction is analogous.

Hence, we pay now attention on the downstream data traffic on bus A and the corresponding upstream request traffic on bus B. Incoming asynchronous traffic streams are assumed to be Poisson. The traffic intensity of asynchronous traffic from station i to station j is denoted by λ_{ij} ($\lambda_{ii} = 0$). Thus, the total traffic Λ_i generated at station i to be transferred on bus A and the total asynchronous traffic Λ on bus A can be written as

$$\Lambda_i = \sum_{j=i+1}^N \lambda_{ij} \quad \text{and} \quad \Lambda = \sum_{i=1}^{N-1} \Lambda_i \quad . \quad (1)$$

We denote p_I and $(1 - p_I)$ the percentages of the isochronous traffic and the remaining bandwidth available to asynchronous traffic. With τ be the slot duration, the asynchronous bus utilization ρ_i of station i and the total asynchronous traffic ρ on bus A are

$$\rho_i = \Lambda_i \cdot \tau \quad \text{and} \quad \rho = \sum_{i=1}^N \rho_i \quad . \quad (2)$$

We observe in the following a segment, which is generated in the station i and passed across the medium access control. It is then to be transmitted to the station j ($j > i$). The segment itself will be transferred on bus A and its request on bus B. As depicted in Fig. 3, we take into account the following time instants, which are significant for the calculation of the segment transfer time according to the DQDB access mechanism:

- (1): arrival epoch of the segment
- (2): time instant, at which the observed segment is scheduled for transmission on bus A. At this time a request is created and is to be sent on bus B. The segment is ready to be transmitted, but still has to wait according to the FIFO discipline in the globally distributed queue.
- (3): the segment is at the head of the global queue and is enabled to be sent, but still has to wait for a free slot flowing by on bus A.
- (4): end of the transmission on the bus
- (5): the segment has arrived at the receiving station j .

This observation leads to a decomposition of the segment transfer time, where the following random variables (r.v.) are defined:

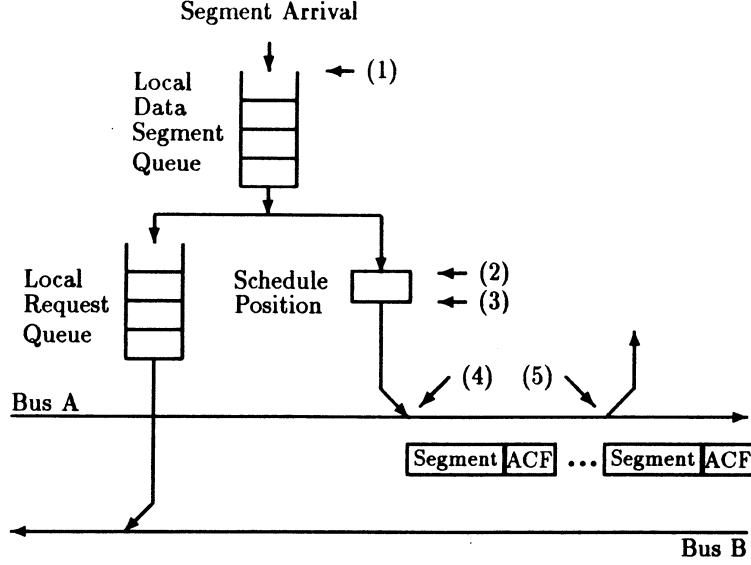


Figure 3: Sending part and modeling concept

T_{12} : r.v. for the waiting time in the local queue in station i ; each priority level has a separate local queue.

T_{23} : r.v. for the waiting time in the schedule position in station i . This waiting time is dependent on the state of the global queue, in conjunction with the distributed queueing scheme.

T_{34} : r.v. for the virtual transmission time

T_{45} : propagation delay from station i to station j .

According to this observation, the medium access delay is T_{14} and the segment transfer time is T_{15} .

3.2 Embedded modeling and medium access delay

We will consecutively determine the distribution functions of T_{34} , T_{23} and T_{12} , which finally deliver the distribution of the medium access delay T_{14} .

The r.v. T_{34} can be interpreted as the interval between free slots seen from the station i . Station i sees a slot stream on bus A, where two types of busy slots can be observed: i) isochronous slot patterns which are periodically allocated and ii) slots already occupied by non-isochronous traffic from stations $1, \dots, i-1$. The distribution of isochronous patterns on the slot stream is assumed to be uniform. Considering in this paper the two special cases $p_I = 0$ and $p_I = 50\%$, we describe approximately the interval between free slots seen from station i with the following geometric distribution:

$$Pr\{T_{34} = k \cdot \frac{1}{p_I} \text{ slots}\} = q_i^{k-1}(1 - q_i), \quad k = 1, 2, \dots$$

$$\text{with } q_i = \sum_{j=1}^{i-1} \frac{\rho_j}{1 - p_I} \quad (3)$$

The according Laplace-Stieltjes transform (LST) is

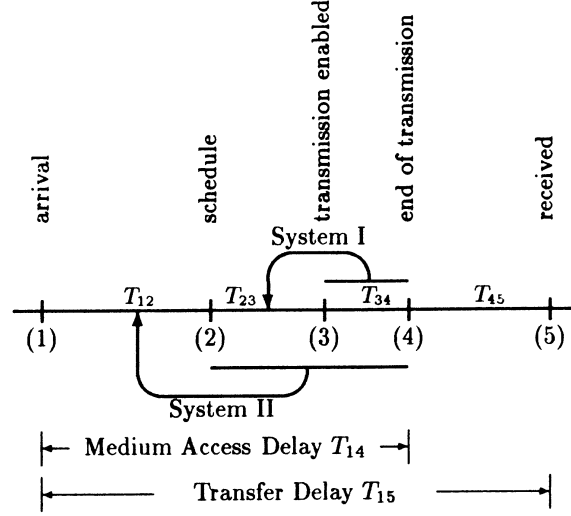


Figure 4: Segment lifetime and analysis concept

$$\Phi_{34}(s) = \frac{(1 - q_i) \cdot z}{1 - q_i \cdot z} \quad \text{where} \quad z = e^{\frac{-sr}{\rho I}} \quad . \quad (4)$$

From modeling point of view, T_{34} is the service time seen from all segments waiting for transmission, which have been noticed from station i . Thus we model the waiting behavior T_{23} of segments in the schedule position (cf. Fig. 3) with a standard M/G/1 system (system I of Fig. 4). The service time of this system is T_{34} . To obtain the traffic intensity of system I we take into account all segments arrival processes of the stations $i, i + 1, \dots, N$. The LST of the distribution function is (see [5])

$$\Phi_{23}(s) = \frac{s \cdot (1 - \Gamma_i \cdot ET_{34})}{s - \Gamma_i(1 - \Phi_{34}(s))} \quad \text{where} \quad \Gamma_i = \sum_{j=i}^N \Lambda_j \quad . \quad (5)$$

One important property of system I is that the mean service time increases while the arrival rate decreases with higher number i of the observed station. It should be noted here that for analyses with multi-classes of priorities, system I should be modified to a non-preemptive priority M/G/1 system with $K = 4$ priority classes. From eqns. (4) and (5), we arrive at the LST for the interval T_{24} between scheduling instant of the segment and the end of the segment transmission.

$$\Phi_{24}(s) = \Phi_{23}(s) \cdot \Phi_{34}(s) \quad . \quad (6)$$

As mentioned, the interval T_{24} can be seen as the virtual transmission time seen from those segments, which arrived at station i to be transferred on bus A. We describe again the waiting process in the local queue (see Fig. 3) by means of a M/G/1 system (system II in Fig. 4). The service process is modelled using the embedded modeling concept, i.e. the service time of system II consists of waiting time components, which had been calculated in system I. The decomposition of the medium access delay as shown in Fig. 4 is not only a time decomposition, but contains nested intervals computed by different submodels. The LST of the distribution function of the waiting time T_{12} in system II can be given accordingly:

$$\Phi_{12}(s) = \frac{s \cdot (1 - \Lambda_i \cdot ET_{24})}{s - \Lambda_i(1 - \Phi_{24}(s))} \quad . \quad (7)$$

Finally, we arrive at the medium access delay:

$$\Phi_{14}(s) = \Phi_{12}(s) \cdot \Phi_{23}(s) \cdot \Phi_{34}(s) \quad . \quad (8)$$

To obtain the total transfer delay, the propagation delay T_{45} , which can easily be estimated from the station-to-station distance r_{ij} , has to be added. Out of eqns. (3–8) values of interest like means and coefficients of variation of the medium access delay and the total transfer time can be derived.

3.3 Extensions of the analysis concept

The analysis concept described above can be used also in the general case of multiple priority classes. The system I should be remodelled as a non-preemptive priority system. The system II consists of a number of M/G/1 queues, which operate in parallel according to the existing priority classes.

To model more realistic traffic process, the Poisson input streams should be replaced by general renewal processes. The systems I and II are then G/G/1 systems, which can be analyzed numerically using discrete-time analysis techniques (cf. [9]). On the one hand, we have in this case no longer a close-form solution. On the other hand, the numerical computation of the whole distribution becomes tractable using discrete-time transform methods.

4. Numerical results

4.1 Approximation accuracy

To validate the approximate analysis, we consider a metropolitan area network with $N = 25$ stations, which are equidistantly located on a dual bus system of length 100 kilometers and transmission capacity 136 Mbps each. The slot length is chosen at 69 Bytes (64 B segment payload, 4 B header, 1 B ACF). The percentage of isochronous traffic is taken at $p_I = 50\%$. In the diagrams shown in this section, we normalized the asynchronous traffic to the available bandwidth for non-isochronous traffic streams as $\rho^* = \rho/(1 - p_I)$. Delays are given in μsec .

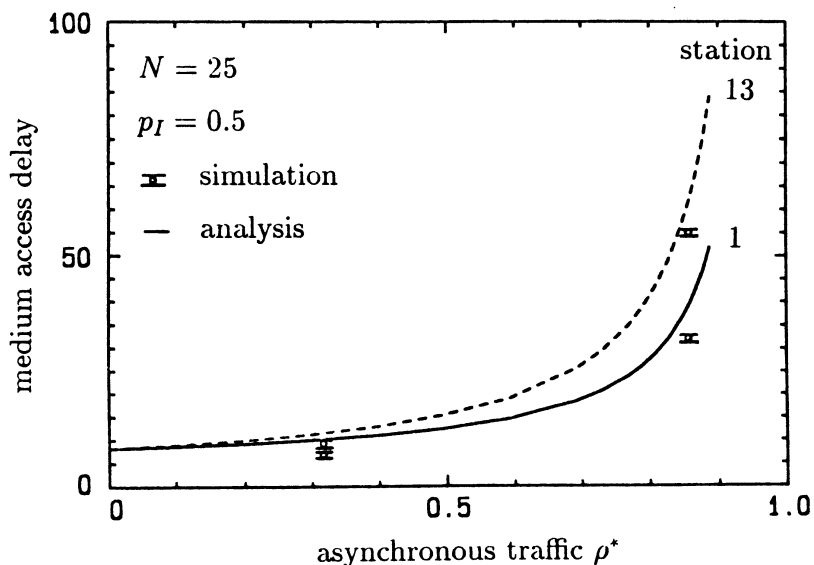


Figure 5: Approximation accuracy

Fig. 5 depicts the mean access delay of stations 1 and 13 as a function of the asynchronous traffic intensity. The mean access delay is computed here considering both downstream and upstream traffic on bus A and bus B. The traffic matrix is assumed to be symmetric, i.e. $\Lambda_{ij} = \rho \cdot c^* \cdot \frac{2}{N(N-1)}$ ($i \neq j$), with c^* be the bus speed (in $\frac{\text{slots}}{\text{sec}}$). The comparison with simulation results shows that the analysis is sufficiently accurate for dimensioning purposes.

4.2 DQDB medium access delay

In the following, the number of station of the metropolitan area network is chosen to be $N = 49$. We consider two traffic configurations: i) configuration 1 with symmetrical traffic and ii) configuration 2 with nonsymmetrical traffic: an overloaded station 25 having 50 % of the total offered traffic and all other stations symmetrically loaded. The delay is measured for one transmission direction (bus A) only.

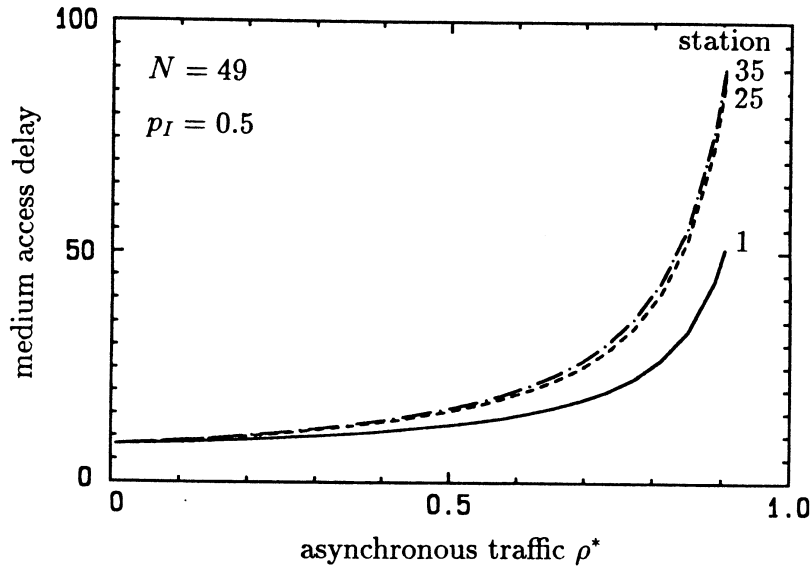


Figure 6: Medium access delay vs asynchronous traffic

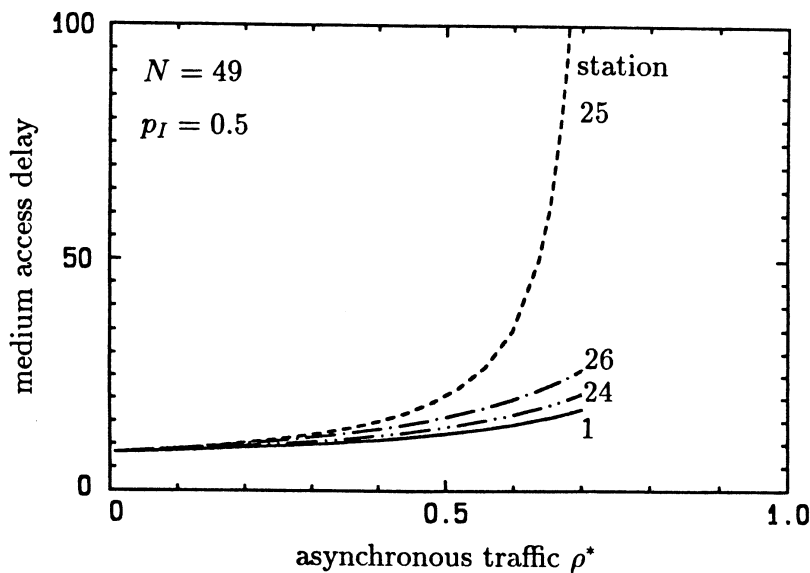


Figure 7: Influence of nonsymmetrical traffic

Figs. 6 and 7 show the mean access delay for the two configurations 1 and 2 respectively. As expected, according to the often observed unfairness behavior of the DQDB protocol (cf. [3]), the mean access delay is station-dependent. For both configurations, the first station has the smallest access delay. For configuration 1, the station 35 has the largest access delay, and behind this station the mean access delay starts to decrease again. Note that the capacity limit of the entire system is defined by the station with the largest access delay. It is clearly shown that for a given total traffic, the capacity limit of the system is strongly dependent on the distribution of the traffic according to the traffic matrix. For configurations 1 and 2 it is about 0.9 and 0.7; this indicates that a non-symmetrical traffic distribution leads to a worse system performance.

We observe more closely the influence of the overload in station 25 of configuration 1 on the following stations in Fig. 8. The dotted line and the full line depict the station-dependent mean access delay for the total asynchronous traffic $\rho^* = 0.5$ and $\rho^* = 0.7$ respectively. The phenomenon of acquired overload can be seen here, showing that a station located behind the overloaded station suffers larger delay than a station positioned in front of it.

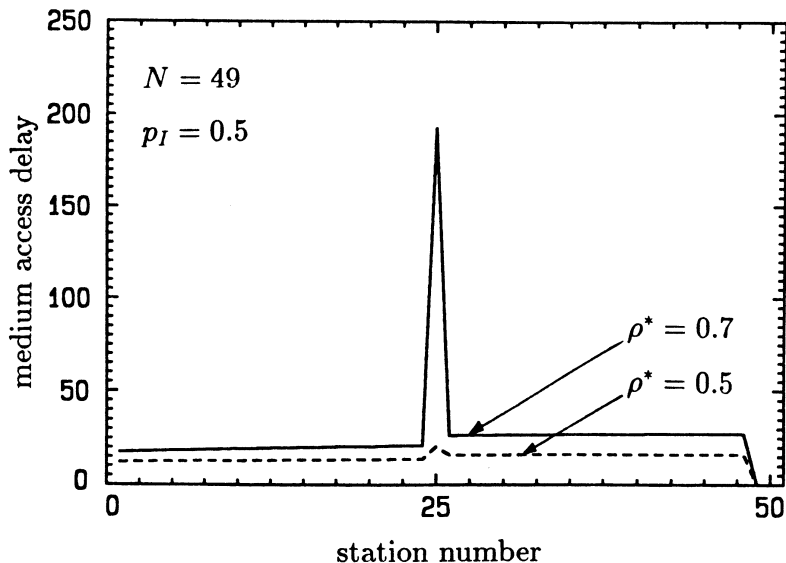


Figure 8: Nonsymmetrical traffic and acquired overload

5. Conclusion and outlook

An approximate performance study of the DQDB medium access protocol has been presented. The main results obtained are approximate expressions for various delays in the system like the medium access delay given in the form of Laplace-Stieltjes transform. From these basic relationships, further measures of interest like the mean and the coefficient of variation of the mean access delay can be derived. The analysis is based on a decomposition approach of the medium access delay, using embedded modeling technique. Non-isochronous station-to-station traffic distribution matrices can be chosen arbitrarily. As shown in comparisons with simulations, the accuracy of the approximation is sufficient for a wide range of protocol parameters.

Some major properties of the DQDB had been carried out with the analysis showing by means of numerical results: i) the station-location dependency of the medium access time which can be interpreted as a unfairness property of the DQDB protocol and ii) the sensitivity of the overall system performance (capacity limit) concerning the station-to-station traffic distribution matrix.

The modeling and analysis approach as presented in this paper is being extended to cope with more general input processes to describe more realistic traffic streams in data networks. The extension is

done in the context of discrete-time queueing systems. The submodels used in these analyses are of type G/G/1, for which methods operating in both time and transform domain can be employed.

Acknowledgement

The authors would like to thank Dr. Mehdi Nassehi (IBM Zurich Research Laboratory) and Prof. J.W. Wong (University of Waterloo) for stimulating discussions and Klaus Sauer (University of Stuttgart) for providing simulation results for validation purposes.

References

- [1] Z. L. Budrikis et al, "QPSX: A Queue Packet and Synchronous Circuit Exchange", *ICCC '86*, Munich, 1986, 288-293.
- [2] P. Davids, Th. Welzel, "Performance Analysis of DQDB Based on Simulation", *Third IEEE Workshop on Metropolitan Area Networks*, San Diego, March 28 - 30, 1989.
- [3] M. N. Huber, K. Sauer, W. Schödl, "QPSX and FDDI-II Performance Study of High Speed LAN's", *EFOC/LAN 88*, Amsterdam, June 29 - July 1, 1988.
- [4] IEEE Working Group, *Proposed IEEE Standard 802.6 - Distributed Queue Dual Bus (DQDB) - Metropolitan Area Network (MAN)*, Draft versions: June 1988, November 1988, Spring 1989.
- [5] L. Kleinrock, "Queueing Systems, Volume I: Theory, Volume II: Computer Applications", John Wiley & Sons, New York, 1975/76.
- [6] J. F. Mollenauer, "Standards for Metropolitan Area Networks", *IEEE Communications Magazine*, 26, April 1988, 15-19.
- [7] R. M. Newman, J. L. Hullett, "Distributed Queueing: A Fast And Efficient Packet Access Protocol for QPSX", *ICCC '86*, Munich, 1986, 294-299.
- [8] R. M. Newman, Z. L. Budrikis, J. L. Hullett, "The QPSX MAN", *IEEE Communications Magazine*, 26, April 1988, 20-28.
- [9] Tran-Gia P., "Discrete-Time Analysis for the Interdeparture Distribution of GI/G/1 Queues", Proc. Seminar on Teletraffic Analysis and Computer Performance Evaluation, June 1986, Amsterdam.
- [10] J. W. Wong, "Throughput of DQDB Networks under Heavy Load", *EFOC/LAN 89*, Amsterdam, June 14 - 16, 1989.
- [11] M. Zukerman, "Queueing Performance of QPSX", *12th International Teletraffic Congress*, Torino, June 1-8, 1988, paper 2.2B.6.
- [12] M. Zukerman, "Approximations for Performance Evaluation of the Packet Access Queue in QPSX: the IEEE 802.6 Evolving MAN Standard", *Australian Telecommunication Research*, 22, No. 2, 1988, 53-62.
- [13] M. Zukerman, "Circuit Allocation and Overload Control in a Hybrid Switching System", *Computer Networks and ISDN Systems*, 16, 1988/89, 281-298.